

Every SeriousWindows 501 Series is Packed With Durability and Performance

UNITIZED CONSTRUCTION

Fusion welded sash and beveled frame create durable air and water tight window components.



DELUXE VENT LIMIT

Easy operating deluxe vent latches limit movement of lower sash to restrict the size of the ventilated opening.



RECESSED TILT LATCHES

Aesthetically pleasing latches allow you to clean the glass safely from inside your home by utilizing the tilt-in sash feature.





AIR TIGHT SASHES

Easy operating cam lock and keeper secure and seal both sash reducing air infiltration at the meeting rail.




SUPERIOR PERFORMANCE


Full length lift rail makes sash operation simple while the advanced sill design reduces the risk of water infiltration.

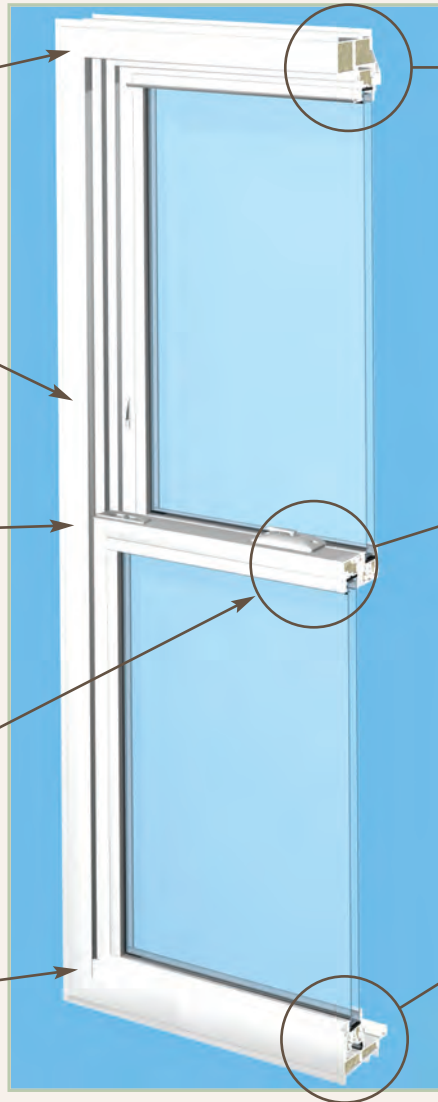

Upper sash sits tightly in the head of the window. Twin weather seals and foam filling maximize energy performance.



Integral interlock at the meeting rail is backed up by twin weather seals providing maximum insulating power.



Six degree sloped sill with foam filling boasts a built-in track for screen support and external frame legs for accurate installation.



Unique ILS™ Interlocking Sill improves the SeriousWindows™ 501 insulating performance. When closed, the bulb seal and overlock of the lower sash engages the upstanding mid-sill leg. This powerful combination is a substantial barrier to air/water infiltration.